


Product Datasheet

RPU3015

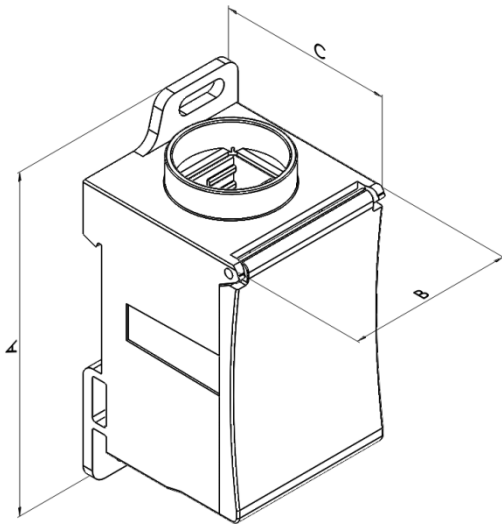

Main

Family Compact Distribution Blocks

Version 1 Pole

Code RPU3015

Reference RPU 400-11 S

Number per package 1

In(A)	IEC/EN	400 A
	UL	310 A

Weight (Kg) 0.358

A (mm) 96

B (mm) 47

C (mm) 50

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Technical Data

Type	1 Pole 11 outputs 400 A					
400 A	COFLEX* L(mm)	Stripped wire (mm ²)	Wire with ferrule (mm ²)	No.	Dim. (mm)	Tight. Torque (Nm)
IN	15.5 - 20	95 ÷ 185	95 ÷ 120	1	20.5x16	25
OUT	-	6 ÷ 35	6 ÷ 25	2	Ø 9	10
OUT	-	2.5 ÷ 16	2.5 ÷ 16	5	Ø 6.8	6
OUT	-	2.5 ÷ 10	2.5 ÷ 10	4	Ø 6.1	3
I _{cw} (kA)	25.2					
I _{pk} (kA)	65.9					
U _i (V)	1000					

I_{cc pk} = Short-circuit current peak value expressed in kA

I_{cw} = Effective value of short-circuit current, duration equal to 1 second, expressed in kA as per standard IEC 947-7-1

U_i = Nominal Insulation voltage

*See COFLEX technical features



Technical Features

Insulating body: PA 66 UL 94-V0, gray RAL 7035.

Cover: PC UL 94-V0, transparent yellow

Conduction block: Tinned Copper

Clamps: Galvanized steel and Al alloy

Screws: Galvanized steel

Index protection IP20

Compliant with standard EN 60947-7-1

UL 1059 standard recognized.